



PROFESSIONAL
TECHNOLOGY
INNOVATION
SERVICE




中型齒輪減速機

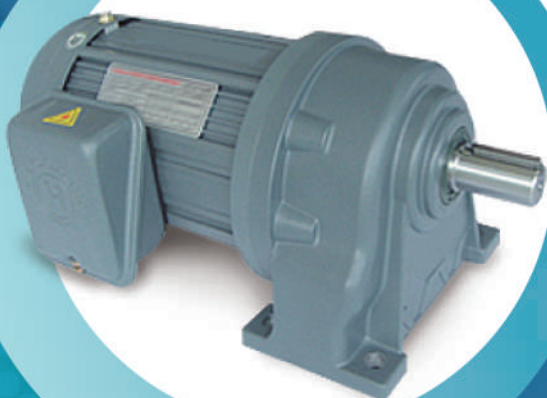


1-1 配線盒方向選定


(類型)
H 型




TL 標準



TR




TU




TD

(類型)
V 型




TL 標準



TR




TU




TD

1-2 減速機與透氣塞安裝位置示意圖


H 機型
安裝範例




HO 標準




HL




HI



HR




HU




HD


V 機型
安裝範例



VO 標準



VU



VD

※ 除標準安裝方式外，其餘安裝方式均需先告知本司。

H-22-200-60-S-B

└ 剎車 <選用>

A：單相 110 / 220V, 50 / 60HZ 1-Phase


S：三相 220 / 380V, 50 / 60HZ 3-Phase

減速比：1：60

馬力：200Watts 1 / 4HP

22：出力軸22mm

H：臥式

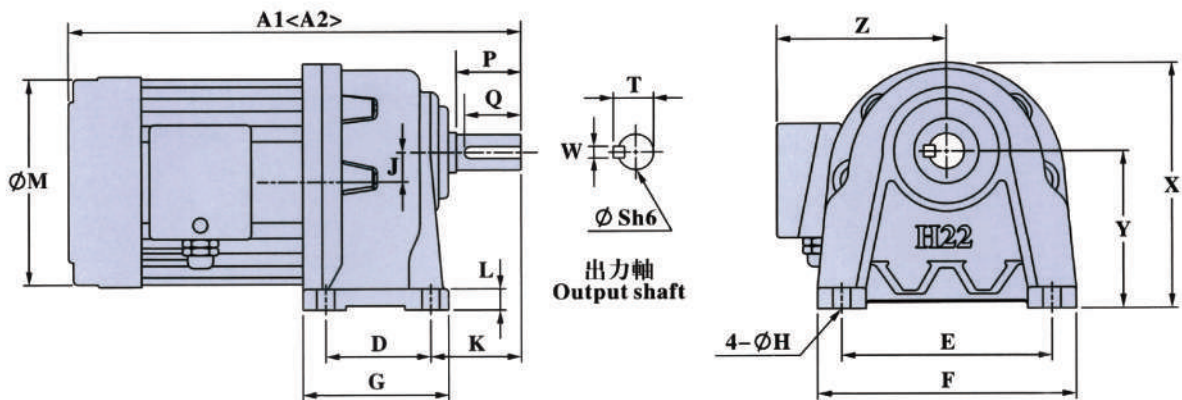

尺寸表(m/m)

馬力 HP-4P	減速比	A1	A2	D	E	F	G	H	L	J	K	M	X	Y	Z	出力軸					重量
																P	Q	S	T	W	
75W (1/10HP)	3-50	253	253	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	5.1
	60-200	265	265	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	5.2
	250-1800	365	355	65	130	163	90	11	13	18.2	56	127	152	97.5	105	40	35	22	25	7	10
100W (1/8HP)	3-50	253	273	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	5.3
	60-200	285	305	65	130	163	90	11	13	18.2	56	127	152	97.5	105	40	35	22	25	7	6.9
	250-1800	385	405	90	140	180	120	11	15	20.8	66	127	180	116	105	45	40	28	31	7	12
200W (1/4HP)	3-10	275	283	40	110	135	65	9	10	16	48	127	132	88.5	105	30	25	18	20	5	6.7
	15-90	307	327	65	130	163	90	11	13	18.2	56	127	152	97.5	105	40	35	22	25	7	8.6
	100-200	337	357	90	140	180	120	11	15	20.8	66	127	180	116	105	45	40	28	31	7	11
	250-1800	475	485	130	170	215	160	13	20	30.2	76	127	210	138.5	105	55	50	32	35.5	10	28
400W (1/2HP)	3-10	327	340	65	130	163	90	11	13	18.2	56	127	152	97.5	105	40	35	22	25	7	11
	15-90	350	370	90	140	180	120	11	15	20.8	66	127	180	116	105	45	40	28	31	7	14
	100-200	385	405	130	170	215	160	13	20	30.2	76	127	210	138.5	105	55	50	32	35.5	10	26
	250-1800	530	545	150	210	260	185	15	23	42.2	85	127	255	160	105	65	60	40	43.5	10	41
750W (1HP)	3-25	375	415	90	140	180	120	11	15	20.8	66	165	180	116	125	45	40	28	31	7	15
	30-120	410	450	130	170	215	160	13	20	30.2	76	165	210	138.5	125	55	50	32	35.5	10	28
	125-200	435	475	150	210	260	185	15	23	42.2	85	165	255	160	125	65	60	40	43.5	10	42
	250-1800	590	625	170	265	330	220	19	25	51.4	100	165	320	200	125	80	75	50	54	14	68
1500W (2HP)	3-25	440	480	130	170	215	160	13	20	30.2	76	190	210	138.5	145	55	50	32	35.5	10	32
	30-120	465	505	150	210	260	185	15	23	42.2	85	190	255	160	145	65	60	40	43.5	10	46
	125-180	515	555	170	265	330	220	19	25	51.4	100	190	320	200	145	80	75	50	54	14	71
2200W (3HP)	4-60	495	-	150	210	260	185	15	23	42.2	85	215	255	160	160	65	60	40	43.5	10	48
	70-120	535	-	170	265	330	220	19	25	51.4	100	215	320	200	160	80	75	50	54	14	73
3700W (5HP)	4-25	510	-	150	210	260	185	15	23	42.2	85	215	255	160	160	65	60	40	43.5	10	50
	30-80	550	-	170	265	330	220	19	25	51.4	100	215	320	200	160	80	75	50	54	14	75

※ A1:三相馬達尺寸 A1:3-Phase MOTOR, A2單相馬達尺寸 A2:1-Phase MOTOR

V-22-200-60-S-B

└ 剎車 <選用>

A：單相 110 / 220V, 50 / 60HZ 1-Phase


S：三相 220 / 380V, 50 / 60HZ 3-Phase

減速比：1：60

馬力：200Watts 1 / 4HP

22：出力軸22mm




V：立式

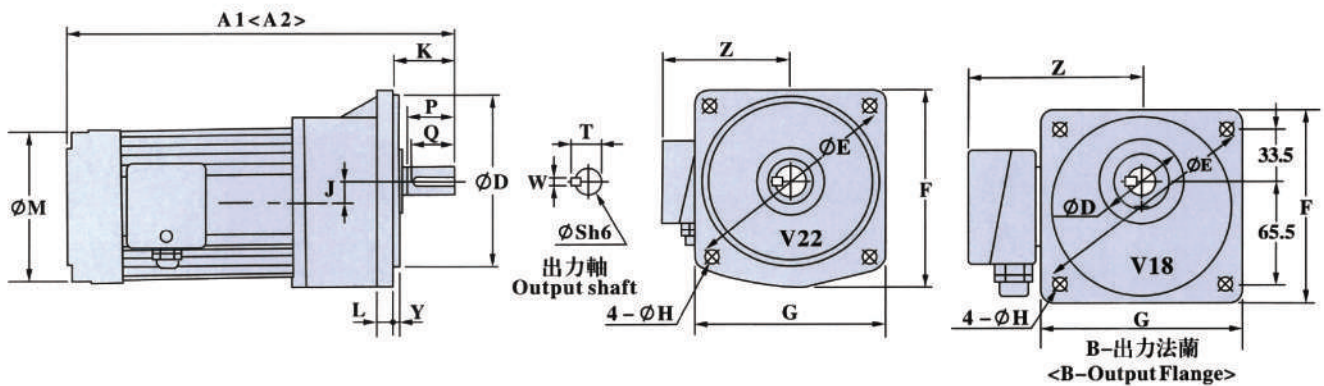

尺寸表(m/m)

馬力 HP-4P	減速比	A1	A2	D	E	F	G	H	L	J	K	M	Y	Z	出力軸					重量
															P	Q	S	T	W	
75W (1/10HP)	3-50(B)	253	253	50	140	122	122	9	12	16	39	127	5	105	30	25	18	20	5	5.1
	60-200(B)	265	265	50	140	122	122	9	12	16	39	127	5	105	30	25	18	20	5	5.2
	250-1800	365	355	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	10
100W (1/8HP)	3-50(B)	253	273	50	140	122	122	9	12	16	39	127	5	105	30	25	18	20	5	5.3
	60-200	285	305	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	6.9
	250-1800	385	405	170	220	195	180	11	14	20.8	56	127	4	105	45	40	28	31	7	12
200W (1/4HP)	3-10(B)	263	283	50	140	122	122	9	12	16	39	127	5	105	30	25	18	20	5	6.7
	15-90	305	325	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	8.6
	100-200	335	350	170	220	195	180	11	14	20.8	56	127	4	105	45	40	28	31	7	11
400W (1/2HP)	250-1800	475	485	185	255	235	216	13	16	30.2	66	127	4	105	55	50	32	35.5	10	28
	3-10	325	345	148	185	170	156	11	12	18.2	47	127	3.5	105	40	35	22	25	7	11
	15-90	355	370	170	220	195	180	11	14	20.8	56	127	4	105	45	40	28	31	7	14
750W (1HP)	100-200	390	405	185	255	235	216	13	16	30.2	66	127	4	105	55	50	32	35.5	10	26
	250-1800	530	545	230	310	295	262	15	22	42.2	80	127	5	105	65	60	40	43.5	10	41
	3-25	370	415	170	220	195	180	11	14	20.8	56	165	4	125	45	40	28	31	7	15
1500W (2HP)	30-120	410	450	185	255	235	216	13	16	30.2	66	165	4	125	55	50	32	35.5	10	28
	125-200	435	475	230	310	295	262	15	22	42.2	80	165	5	125	65	60	40	43.5	10	42
	250-1800	590	625	280	390	365	325	19	22	51.4	89	165	5	125	80	75	50	54	14	68
2200W (3HP)	3-25	440	480	185	255	235	216	13	16	30.2	66	190	4	145	55	50	32	35.5	10	32
	30-120	465	505	230	310	295	262	15	22	42.2	80	190	5	145	65	60	40	43.5	10	46
	125-180	515	555	280	390	365	325	19	22	51.4	89	190	5	145	80	75	50	54	14	71
3700W (5HP)	4-60	495	-	230	310	295	262	15	22	42.2	80	215	5	160	65	60	40	43.5	10	48
	70-120	535	-	280	390	365	325	19	22	51.4	89	215	5	160	80	75	50	54	14	73
3700W (5HP)	4-25	510	-	230	310	295	262	15	22	42.2	80	215	5	160	65	60	40	43.5	10	50
	30-80	550	-	280	390	365	325	19	22	51.4	89	215	5	160	80	75	50	54	14	75

※ A1:三相馬達尺寸 A1:3-Phase MOTOR, A2單相馬達尺寸 A2:1-Phase MOTOR

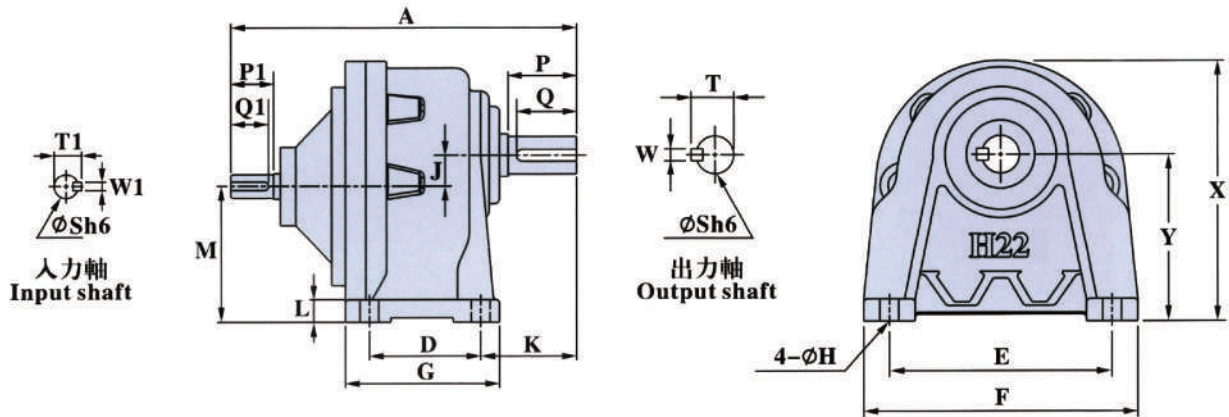
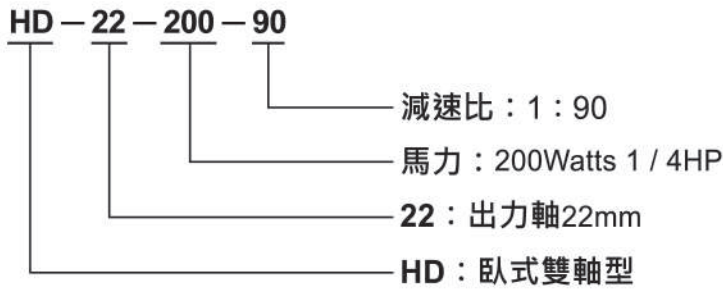


尺寸表(m/m)

馬力 HP-4P	減速比	A	D	E	F	G	H	L	J	K	M	X	Y	出力軸					入力軸					重量
														P	Q	S	T	W	P1	Q1	S1	T1	W1	
100W (1/8HP)	3-50	175	40	110	135	65	9	10	16	48	72.5	132	88.5	30	25	18	20	5	30	25	14	16	5	3
	60-200	207	65	130	163	90	11	13	18.2	56	79.3	152	97.5	40	35	22	25	7	30	25	14	16	5	4
200W (1/4HP)	3-10	175	40	110	135	65	9	10	16	48	72.5	132	88.5	30	25	18	20	5	30	25	14	16	5	3
	15-90	207	65	130	163	90	11	13	18.2	56	79.3	152	97.5	40	35	22	25	7	30	25	14	16	5	5
	100-200	236	90	140	180	120	11	15	20.8	66	95.2	180	116	45	40	28	31	7	30	25	14	16	5	7
400W (1/2HP)	3-10	207	65	130	163	90	11	13	18.2	56	79.3	152	97.5	40	35	22	25	7	30	25	14	16	5	6
	15-90	236	90	140	180	120	11	15	20.8	66	95.2	180	116	45	40	28	31	7	30	25	14	16	5	7
	100-200	273	130	170	215	160	13	20	30.2	76	108.3	210	138.5	55	50	32	35.5	10	30	25	14	16	5	19
750W (1HP)	3-25	276	90	140	180	120	11	15	20.8	66	95.2	180	116	45	40	28	31	7	40	35	19	21.5	6	7
	30-200	315	130	170	215	160	13	20	30.2	76	108.3	210	138.5	55	50	32	35.5	10	40	35	19	21.5	6	21
	125-200	340	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	40	35	19	21.5	6	35
1500W (2HP)	3-25	320	130	170	215	160	13	20	30.2	76	108.3	210	138.5	55	50	32	35.5	10	50	40	24	27.5	8	21
	30-120	350	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	50	40	24	27.5	8	35
	125-180	387	170	265	330	220	19	25	51.4	100	148.6	320	200	80	75	50	54	10	50	40	24	27.5	8	55
2200W (3HP)	4-60	360	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	60	50	28	31	8	35
	70-120	405	170	265	330	220	19	25	51.4	100	148.6	320	200	80	75	50	54	14	60	50	28	31	8	55
3700W (5HP)	4-25	360	150	210	260	185	15	23	42.2	85	117.8	255	160	65	60	40	43.5	10	60	50	28	31	8	35
	30-80	405	170	265	330	220	19	25	51.4	100	148.6	320	200	80	75	50	54	14	60	50	28	31	8	55

VD-22-200-90

- 減速比：1：90
- 馬力：200Watts 1 / 4HP
- 22：出力軸22mm
- VD：立式雙軸型

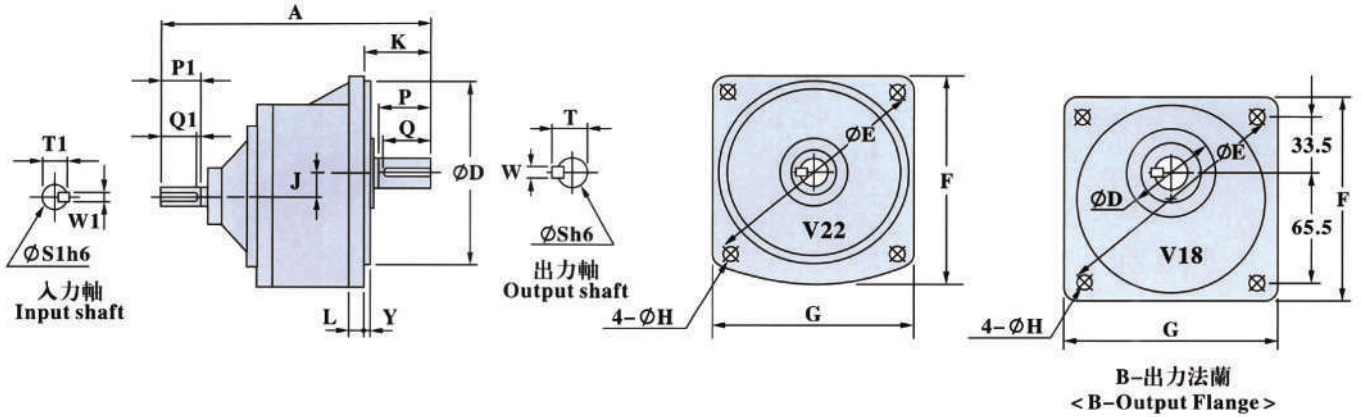



尺寸表(m/m)

馬力 HP-4P	減速比	A	D	E	F	G	H	L	J	K	Y	出力軸					入力軸					重量
												P	Q	S	T	W	P1	Q1	S1	T1	W1	
100W (1/8HP)	3-50(B)	175	50	140	122	122	9	12	16	39	5	30	25	18	20	5	30	25	14	16	5	3
	60-200	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	4
200W (1/4HP)	3-10(B)	175	50	140	122	122	9	12	16	39	5	30	25	18	20	5	30	25	14	16	5	3
	15-90	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	5
	100-200	236	170	220	195	180	11	14	20.8	56	4	45	40	28	31	7	30	25	14	16	5	7
400W (1/2HP)	3-10	207	148	185	170	156	11	12	18.2	47	3.5	40	35	22	25	7	30	25	14	16	5	6
	15-90	236	170	220	195	180	11	14	20.8	56	4	45	40	28	31	7	30	25	14	16	5	7
	100-200	273	185	255	235	216	13	15	30.2	66	4	55	50	32	35.5	10	30	25	14	16	5	19
750W (1HP)	3-25	275	170	220	195	180	11	14	20.8	56	4	45	40	28	31	7	40	35	19	21.5	6	7
	30-200	315	185	255	235	216	13	15	30.2	66	4	55	50	32	35.5	10	40	35	19	21.5	6	21
	125-200	336	230	310	295	262	15	22	42.2	80	5	65	60	40	43.5	10	40	35	19	21.5	6	35
1500W (2HP)	3-25	320	185	255	235	216	13	15	30.2	66	4	55	50	32	35.5	10	50	40	24	27.5	8	21
	30-120	350	230	310	295	262	15	22	42.2	80	5	65	60	40	43.5	10	50	40	24	27.5	8	35
	125-180	390	280	390	365	325	19	22	51.4	89	5	80	75	50	54	14	50	40	24	27.5	8	55
2200W (3HP)	4-60	360	230	310	295	262	15	22	42.2	80	5	65	60	40	43.5	10	60	50	28	31	8	35
	70-120	405	280	390	365	325	19	22	51.4	89	5	80	75	50	54	14	60	50	28	31	8	55
3700W (5HP)	4-25	360	230	310	295	262	15	22	42.2	80	5	65	60	40	43.5	10	60	50	28	31	8	35
	30-80	405	280	390	365	325	19	22	51.4	89	5	80	75	50	54	14	60	50	28	31	8	55

HM - 22 - 200 - 90

- 減速比：1 : 90
- 馬力：200Watts 1 / 4HP
- 22：出力軸22mm
- HM：臥式直結型

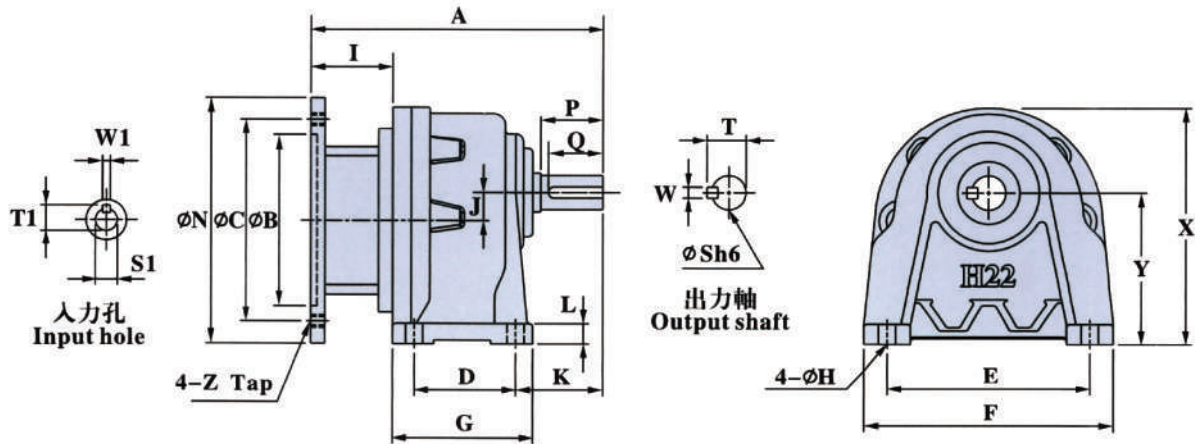

尺寸表(m/m)

馬力 HP-4P	減速比	A	D	E	F	G	H	L	J	K	X	Y	B	C	N	Z	I	出力軸					入力孔			重量
																		P	Q	S	T	W	S1	T1	W1	
200W (1/4HP)	3-10	155	40	110	135	65	9	10	16	48	132	88.5	110	130	158	8	53	30	25	18	20	5	11	13	4	4
	15-90	188	65	130	163	90	11	13	18.2	56	152	97.5	110	130	158	8	53	40	35	22	25	7	11	13	4	6
	100-200	216	90	140	180	120	11	15	20.8	66	180	116	110	130	158	8	53	45	40	28	31	7	11	13	4	8
400W (1/2HP)	3-10	188	65	130	163	90	11	15	18.2	56	152	97.5	110	130	158	8	53	40	35	22	25	7	14	16.5	5	6
	15-90	216	90	140	180	120	11	15	20.8	66	180	116	110	130	158	8	53	45	40	28	31	7	14	16.5	5	8
	100-200	250	130	170	215	160	13	20	30.2	76	210	138.5	110	130	158	8	53	55	50	32	35.5	10	14	16.5	5	21
750W (1HP)	3-25	240	90	140	180	120	11	15	20.8	66	180	116	130	165	198	10	80	45	40	28	31	7	19	21.5	6	11
	30-120	275	130	170	215	160	13	20	30.2	76	210	138.5	130	165	198	10	80	55	50	32	35.5	10	19	21.5	6	26
	125-200	305	150	210	260	185	15	23	42.2	85	255	160	130	165	198	10	80	65	60	40	43.5	10	19	21.5	6	38
1500W (2HP)	3-25	275	130	170	215	160	13	20	30.2	76	210	138.5	130	165	198	10	80	55	50	32	35.5	10	24	27	8	26
	30-120	305	150	210	260	185	15	23	42.2	85	255	160	130	165	198	10	80	65	60	40	43.5	10	24	27	8	39
	125-180	347	170	265	330	220	19	25	51.4	100	320	200	130	165	198	10	80	80	75	50	54	14	24	27	8	60
2200W (3HP)	4-60	320	150	210	260	185	15	23	42.2	85	255	160	180	215	250	12	95	65	60	40	43.5	10	28	31	8	43
	70-120	365	170	265	330	220	19	25	51.4	100	320	200	180	215	250	12	95	80	75	50	54	14	28	31	8	60
3700W (5HP)	4-25	315	150	210	260	185	15	23	42.2	85	255	160	180	215	250	12	95	65	60	40	43.5	10	28	31	8	43
	30-80	365	170	265	330	220	19	25	51.4	100	320	200	180	215	250	12	95	80	75	50	54	14	28	31	8	60

